




## OKRUGLA PERFORACIJA R<sub>dv</sub>

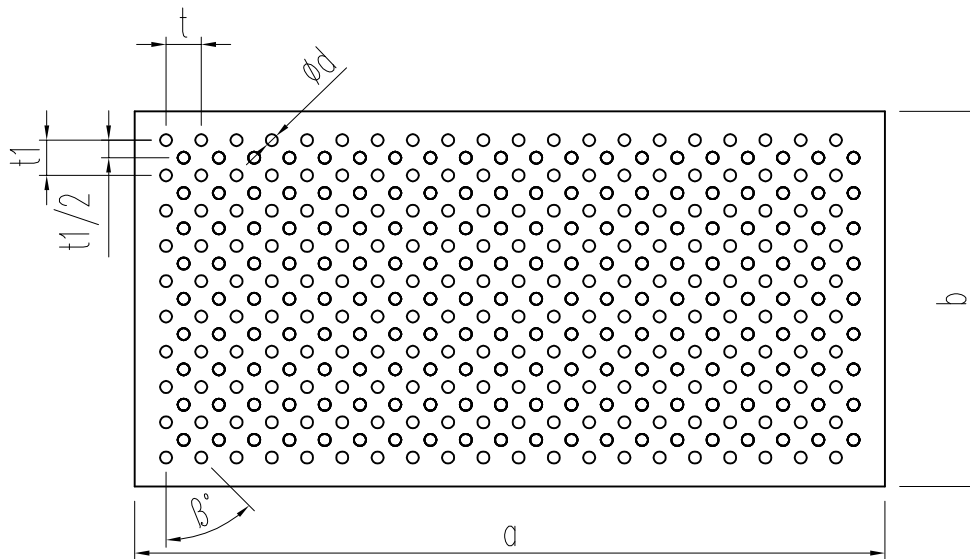


R<sub>dv</sub> 3.2–9.4  
M1:1



R<sub>dv</sub> 4.7–12  
M1:1



R<sub>dv</sub> 8–19  
M1:1



## OKRUGLA PERFORACIJA U DIJAGONALNO POMAKNUTIM REDOVIMA R<sub>dv</sub>

OZNAKA	φd (mm)	t/t <sub>1</sub> (mm)	propusnost
R <sub>dv</sub> 3.2–9.4	3.2	9.4/9.4	9%
R <sub>dv</sub> 4.7–12	4.7	12/12	12%
R <sub>dv</sub> 8–19	8	19/21.9	13%

DEBLJINE MATERIJALA: HVL do 1,5 mm

INOX do 1 mm

AL do 2,5 mm

FORMATI LIMOVA: sve dimenzije do max 1250x2500 mm